

The LXT Series Transmitter features 34 digital channels, and 8 analog functions. Configurable in either 900 MHz or 2.4 GHz with internal processing capabilities, this Transmitter offers a wide range of possibilities when it comes to applications.

2.4 GHz General Specifications

Frequency Range	2400 - 2483.5 MHz
Frequency Control	42 Frequency Hopping Channels (Software Selectable)
Modulation	MSK
Security	Channelization, System ID, and Vendor ID
Operating Temperature	-40C to 85C (-40F to 185F)***
Humidity	Up to 90% RH, non-condensing

900 MHz General Specifications



Frequency Range	ISM 902 MHz – 928 MHz
Frequency Control	7 Frequency Hopping Channels (Software Selectable)
Modulation	DSSS (Direct Sequence Spread Spectrum)
Error Correction	Automatic Error Detection and Automatic Retransmission

900 MHz General Specifications

Operating Temperature	-40C to 85C (-40F to 185F)***
Humidity	Up to 90% RH, non-condensing

Transmitter Specifications

Display	128 x 128 px Sunlight-Readable E-Link display
Battery Voltage	5 Alkaline Batteries or 5 NiMH Rechargeable Batteries-2000mAh
Supply Voltage	9-32 VDC; 1 A max
Max. Current Consumption	<180 mA (RF Active); <10 mA (Idle Mode)
Digital Inputs	34 Available
Analog Inputs	8 Available – 0-5 VDC (configurable as Digital Inputs)
LED Outputs	2 available (RF and Error)
CAN Connection	J1939 (2-wire)
Power Saving Features	RF Emissions Off Delay <1s; Sleep Mode (<1 mA)
Battery Life	10 h Typical: Usage Dep.
Antenna	Internal*
Dimensions	Approx. 8.75" x 4.5" x 4.5"
Weight	Approx. 2 Lbs.
Enclosure	IP 67

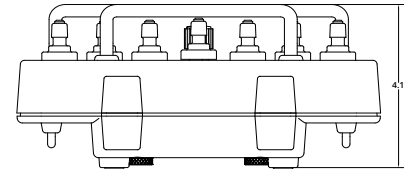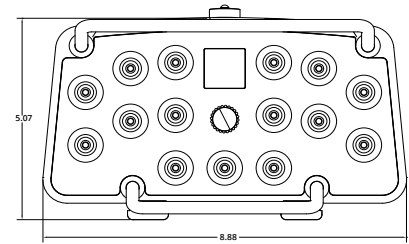

Applications

- Machine Control
- Construction Equipment
- Industrial Control Systems

Options

- LDA-Rx Series
- LXM Series
- LGR Series



005WWCA0358
005WWCA0359



* Internal is standard but external antenna is available upon request
 ** Operating range is based on the use of an internal antenna; an external antenna may increase the range significantly depending on the application.
 *** -20C to 54C with Rechargeable Batteries